

SX 484 R

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

*This was from a over-lay  
Project in 1971*

REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: S. W. Cor. Section No. 10 Town 1N Range 13E

Location CL. Station 0#00 Proj. No. S-497(A) County RICHARDSON

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1" Square Bar-Not Disturbed

Description of corner marker established and depth below surface:

1" Square Bar 0.3 Deep

Description of permanent witnesses established:

1. "X" N. E. Cor. Parapet Wall 5. "X" Center Parapet
2. Nail in Tel. Pole
3. S. E. Cor. H&W11.
4. S. E. Cor. H&W11.

Established this 10 of September 1964 by George E. Bat E. A. III  
(day) (month) (name) (title)

Witness: Charles D. Whinn Richard J. Miller  
(name) (address)

Witness: Greg Brown Levenell Meltz  
(name) (address)

Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1,2,3 Right of Way Director  
Division Engineer

SEAL

8.50 m. 11.16.

10

6.601

[illegible]

1. *Phragmites australis* (Cav.) Trin. ex Steud.

*Handwritten:* 10/10/10

188. Dr. 0/00 1' 57 sec 50

152-6-2

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner East  $\frac{1}{4}$  Corner Section No. 9 Town 1 N Range 13 ELocation 19.3 Lt Station 26419.3 Proj. No. S-497 C County Richardson  
*Proj. No. S-497-A Plans*Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

 $\frac{3}{4}$ " Rebar 6" Deep Destroyed By Construction

Description of corner marker established and depth below surface:

 $\frac{3}{4}$ " Pipe With Brass Cap in the Top 6" Below Surface of Shoulder

Description of permanent witnesses established:

1. Bent Nail Top Fence Post 107.2 N.E.
2. Nail Tel. Pole 57.5 S.W.
3. S.E. Corner R.O.W. Marker 51.4 N.W.
4. Nail Top Fence Post 55.1 N.W.

Established this 20 of August, 1972 by Paul H. Miller EAT  
(day) (month) (name) (title)Witness: Charles D. Morrissey Tecumseh, Nebraska  
(name) (address)Witness: Raymond C. Durmon Tecumseh, Nebraska  
(name) (address)Approved: \_\_\_\_\_  
Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL

6.  $\frac{1}{2}$

2



SEC. 9 - 7 - 2 - 10



STATE OF NEBRASKA  
DEPARTMENT OF ROADS

REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: N.E. Section Cor. Section No. 9 Town 1N Range 13 E

Location 21.63 Lt Station 53+00.75 Proj. No. 5-497 C County Richardson

Proj. No. 5-497-A Plans

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

$\frac{3}{4}$ " Rebar 6" Deep Destroyed By Construction

Description of corner marker established and depth below surface:

$\frac{3}{4}$ " Pipe With Brass Cap in the Top. 6" Below Surface of Shoulder

Description of permanent witnesses established:

1. Near Face R.O.W. Marker Due East 61.3
2. Nail Top Fence Post S.E. 98.0
3. Near Face R.O.W. Marker Due West 37.7
4. Nail Tel. Pole N.W. 69.85

Established this 20 of August, 1971 by David Mueller FA III  
(day) (month) (name) (title)

Witness: Thomas D. Moressey Tecumseh, Nebraska  
(name) (address)

Witness: Bryant C. Dutton Tecumseh, Nebraska  
(name) (address)

Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_


Copies:

- 1,2,3, Right of Way Director  
4 Division Engineer

SEAL



§ 4

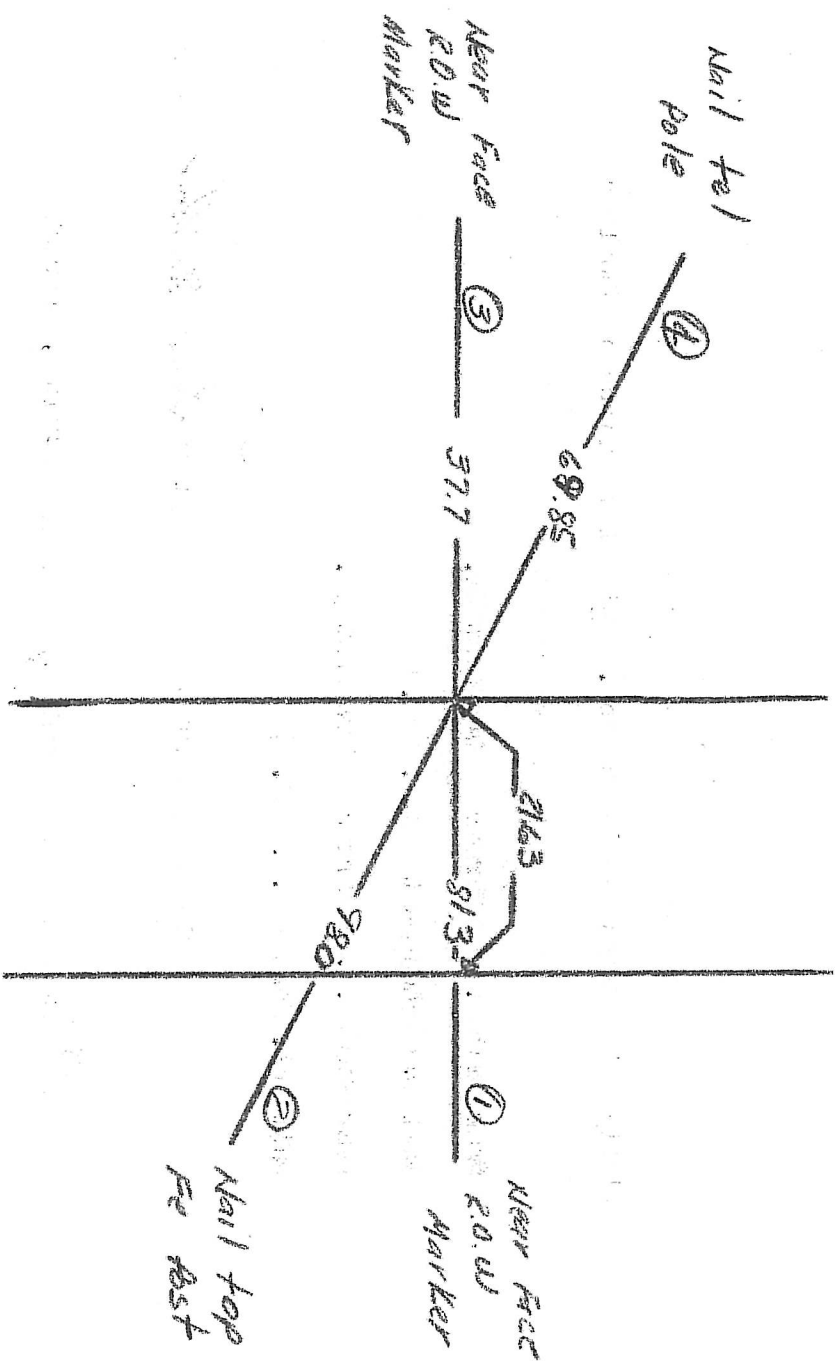

NE Sec cor  
Sec 9 - T1N - R13E  
Sta 53+00.75  
21.63 Lt

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: East  $\frac{1}{4}$  Corner Section No. 4 Town 1-N Range 13-ELocation 79+38.9 Station 10.5 ReProj. No. 5-497 C County RichardsonProj. No. 5-497-A PlansPlace location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

Covered with Asphalt During Construction

Description of corner marker established and depth below surface:

 $\frac{3}{4}$ " Pipe with Brass Cap in the Top. 1" Below Asphalt Surface

Description of permanent witnesses established:

1. Nail in Power Pole N.E. 110.05
2. Near Face R.O.W. Marker Due East 108.7
3. N.E. Corner R.O.W. Marker S.W. 156.3
4. Nail Corner Fence Post S.W. 138.6

Established this 30 of April, 1971 by Donald McMiller EA 4  
(day) (month) (name) (title)Witness: Thomas J. McMiller Tecumseh, Nebraska  
(name) (address)Witness: Raymond C. Wurm Tecumseh, Nebraska  
(name) (address)

Approved: \_\_\_\_\_ Deputy State Surveyor Date \_\_\_\_\_


Copies:  
1, 2, 3, Right of Way Director  
4 Division Engineer

SEAL



W

E

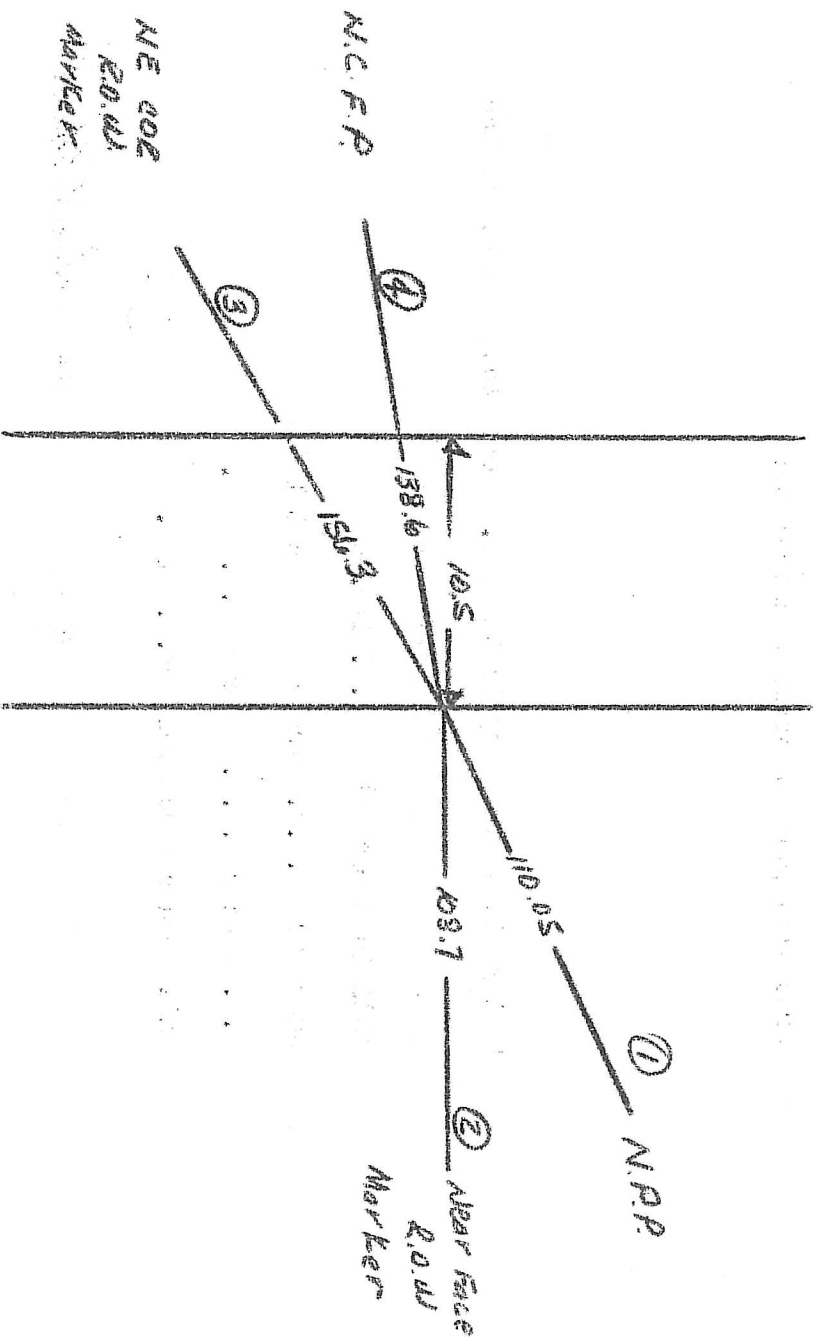

EAST 1/4 CORNER  
SEC 4 - T1N - R13E

10.5  
79 + 38.9

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: N.E. Section Cor. Section No. 4 Town 1-N Range 13-E  
Location 12.1 Rt. Station 105+46.9 Proj. No. 5-497-C County Richardson

Proj. No. 5-497-A Plans

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

$\frac{1}{2}$ " Rebar 6" Deep Destroyed By Construction

Description of corner marker established and depth below surface:  
 $\frac{1}{2}$ " Pipe with Brass Cap in the Top. 6" Below Surface

Description of permanent witnesses established:

1. "X" Center Line Headwall N.E. 39.7
2. Near Face R.O.W. Marker Due East 77.5
3. S.E. Corner Headwall N.W. 132.1
4. P.O.T. Spike on Center Line Station 105+45 N.W. 50.6

Established this 20 of August, 1971 by David Spiller EA III  
(day) (month) (name) (title)


Witness: Thomas D. Morrissey Tecumseh, Nebraska  
(name) (address)

Witness: Raymond C. Nutman Tecumseh, Nebraska  
(name) (address)

Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1, 2, 3, Right of Way Director  
4 Division Engineer

SEAL

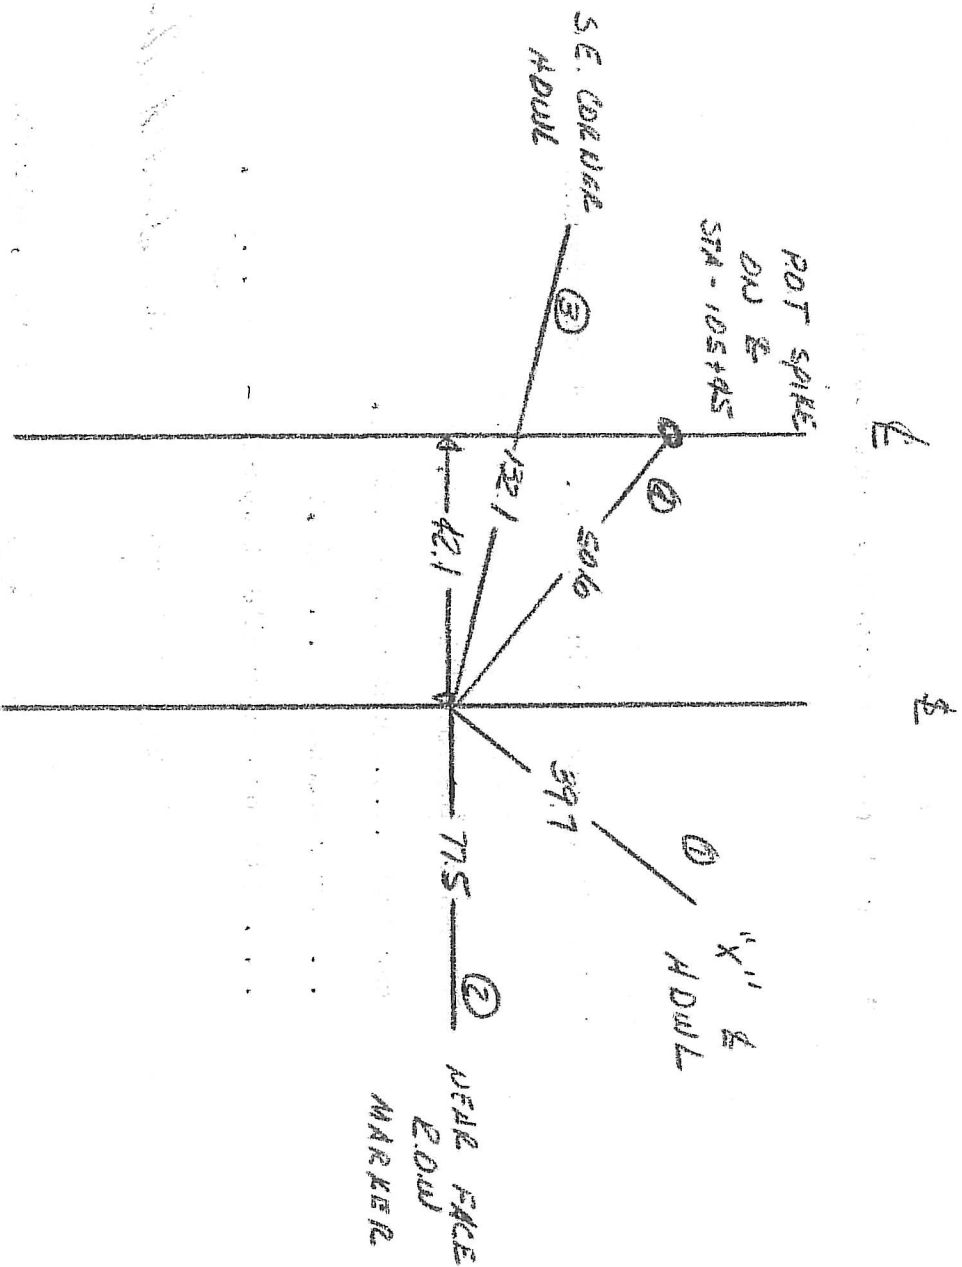

N.E SEC CORNER  
SEC 4 - T110 - R13E  
42.1 E+ E  
STA 105 + 16.9

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: East  $\frac{1}{4}$  Corner Section No. 33 Town 2-N Range 13-E  
Location 36.2 1st Station 131.459 7 Proj. No. S-497 G County Richardson

*Proj. No. S-497-A Plans*

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

$\frac{3}{4}$ " Rebar 6" Deep. Destroyed By Construction

Description of corner marker established and depth below surface:

$\frac{1}{2}$ " Pipe With Brass Cap in The Top. 6" Below Surface

Description of permanent witnesses established:

1. S.W. Corner Headwall N.E. 30.8
2. S.W. Corner Headwall N.E. 76.7
3. Nail in Power Pole S.W. 66.6
4. Nail in Tel Pole N.W. 46.6

Established this 20 of August, 1972 by Donald Andrew BATTI  
(day) (month) (name) (title)

Witness: Donald D. Morrissey Tecumseh, Nebraska 68150  
(name) (address)

Witness: Raymond C. Wurtman Tecumseh, Nebraska 68150  
(name) (address)


Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



\$ E

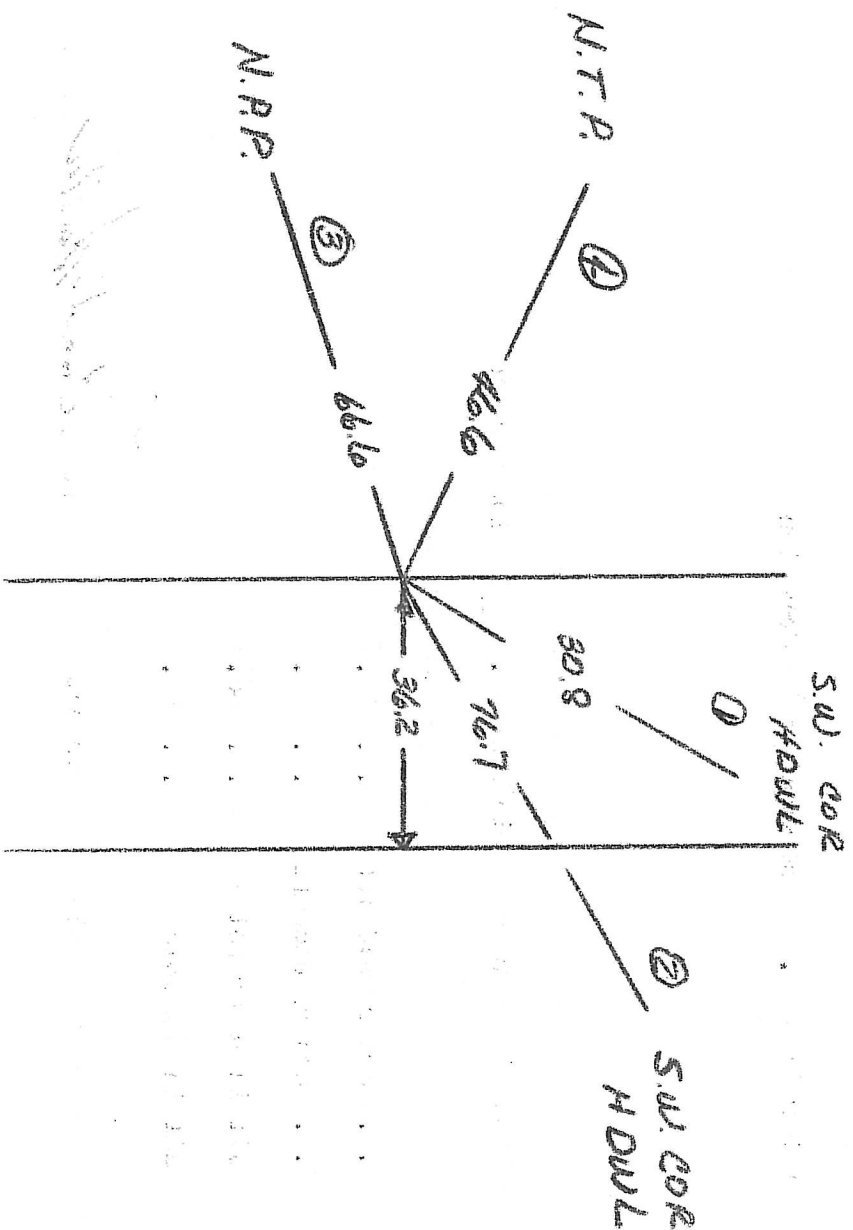

EAST 1/4 CORNER  
SEC 33-T2N-R13E  
36.2 47.8 51.0 54.0 57.0 60.0  
STA. 131+59.75



STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: N.E. Section Cor. Section No. 33 Town 2-N Range 13-ELocation 0.0 lt Station 158.402.6 Proj. No. S-497 C County Richardson*Proj. No. S-497-A Plans*Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1/2 Rebar 1" Deep. Covered with Asphalt During Construction.

Description of corner marker established and depth below surface:

3/4 Pipe With Brass Cap in The Top. 1" Below Asphalt Surface

Description of permanent witnesses established:

1. Nail in Top Fence Post. N.E. 71.6
2. Nail Face R.O.W. Marker. Due East 68.05
3. Top Corner Fence Post. S.W. 70.2
4. Nail in Power Pole. N.W. 70.6

Established this 30 of April, 1972 by Paul Miller E.A.L.  
(day) (month) (name) (title)Witness: Thurman J. Miller Tecumseh, Nebraska 68150  
(name) (address)Witness Raymond C. Durman Tecumseh, Nebraska 68150  
(name) (address)Approved: \_\_\_\_\_  
Deputy State Surveyor Date


Copies:

- 1, 2, 3, Right of Way Director
- 4 Division Engineer

SEAL



£ £

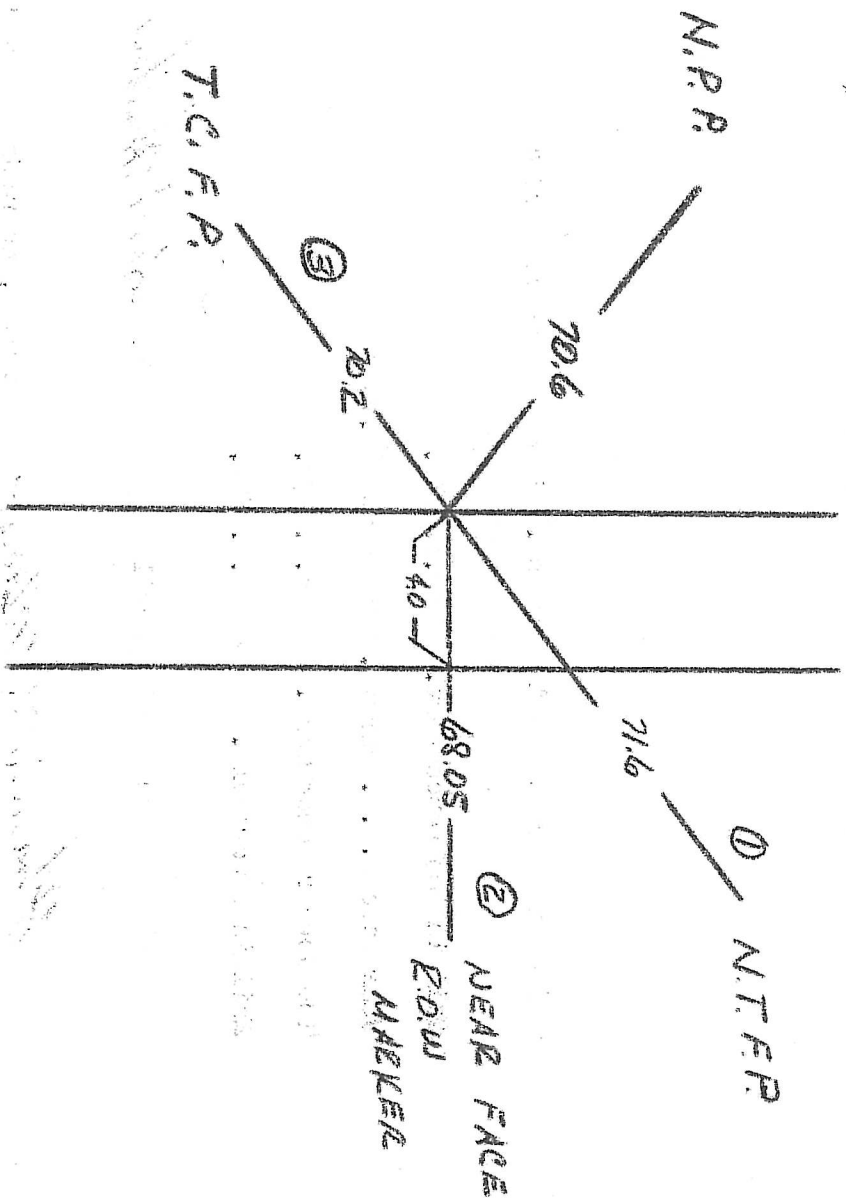

NE SEC CORNER  
SEC 33-TEN-K13E  
4.048  
158+02.6

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: East 1/2 Corner Section No. 28 Town 2-N Range 13-WLocation 3.41 1st Station 184.12 S. 9 Proj. No. 5-197 0 County Richardson*Proj. No. 5-497-A Plans*Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1/2" Rebar 1" Deep. Covered with Asphalt during Construction

Description of corner marker established and depth below surface:

1/2" Pipe with Brass Cap in the Top. 1" Below Asphalt Surface.

Description of permanent witnesses established:


1. Nail Top Fence Post N.B. 95.9
2. Nail Top Corner Fence Post Due East 81.0
3. Nail Top Corner Fence Post S.W. 100.5
4. Nail in Power Pole S.W. 59.9

Established this 30 of April, 1971 by Paul Muller MA 4  
(day) (month) (name) (title)Witness: Harold T. Plummer Tecumseh, Nebraska  
(name) (address)Witness: Raymond C. Durman Tecumseh, Nebraska  
(name) (address)


Approved: \_\_\_\_\_ Deputy State Surveyor Date \_\_\_\_\_

Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



E  
E

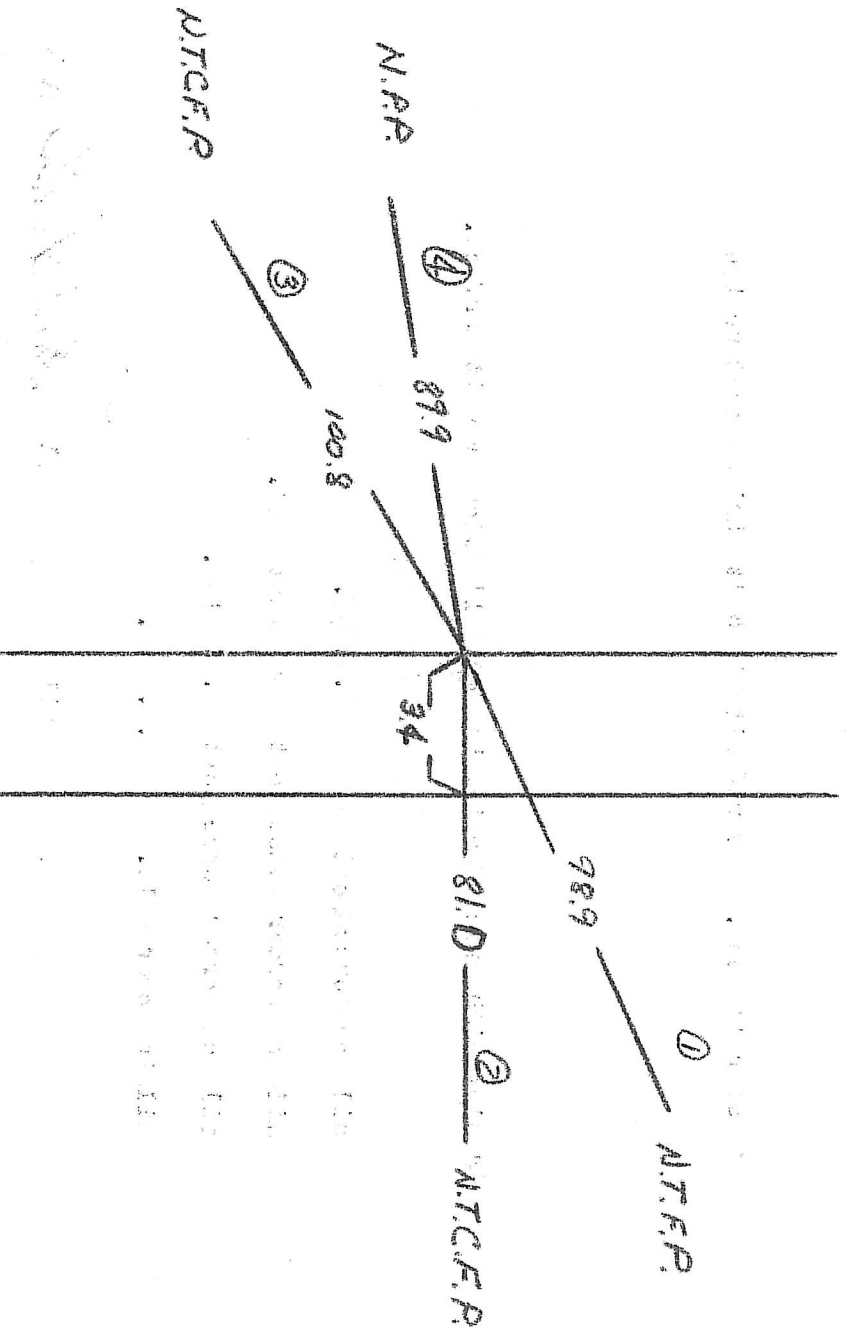

EAST. 1/4 CORNER  
SEC 28-T2N-R13E  
34.4 + 18  
184 + 42.9

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: W. 1/4 Section 001, Section No. 25 Town 2-N Range 13-ELocation 3.05 1/4 Station 2104322 Proj. No. 84970 County Richardson

Proj. No. S-497-A Plans

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1/2" Rebar 1" Deep. Covered with Asphalt During Construction.

Description of corner marker established and depth below surface:

1/2" Pipe W 1 1/4 Brass Cap in the Top. 1" Below Asphalt Surface.

Description of permanent witnesses established:


1. S.W. Corner R.O.W. Marker N.W. 119.7
2. N.W. Corner R.O.W. Marker S.W. 111.25
3. N.W. Corner R.O.W. Marker S.W. 76.55
4. S.W. Corner R.O.W. Marker W.W. 86.0

Established this 30 (day) of April (month), 1971 by David R. Smith (name) DA (title)Witness: Thomas J. Mauer (name) Township, Nebraska (address)Witness: Raymond L. Dutton (name) Township, Nebraska (address)


Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



\$ 4

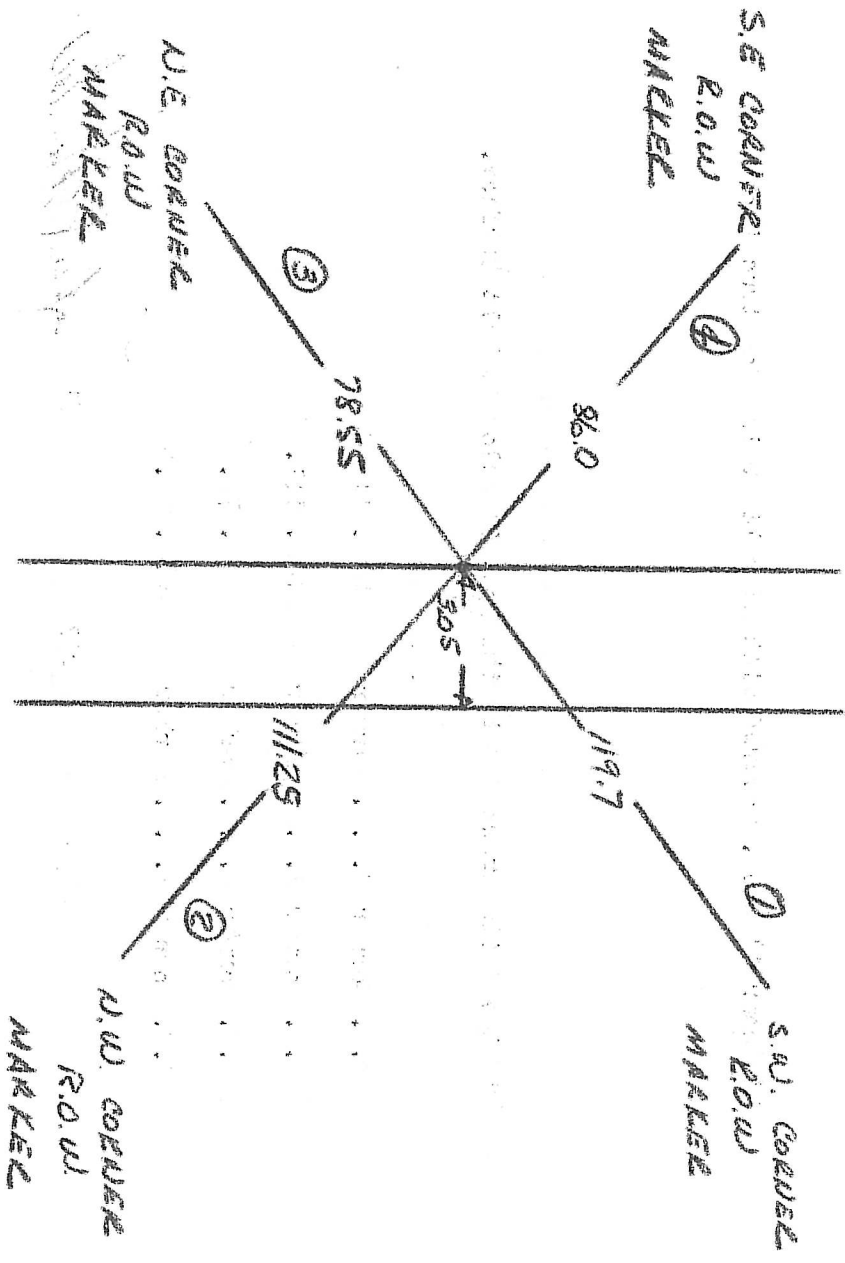

N.E. SECTION CORNER  
SEC. 28 - TEN - E 13 E  
395.4 + 8  
210 + 83.2

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: East  $\frac{1}{2}$  Corner Section No. 21 Town 2-N Range 13-ELocation 1.5 Ets. Station 237428. Proj. No. 54970 County Richardson

Proj. No. 5-497-A Plans

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

 $\frac{1}{2}$ " Rebar 1" Deep. Covered With Asphalt During Construction.

Description of corner marker established and depth below surface:

 $\frac{1}{2}$ " pipe with Brass Cap in the top. 1" below Asphalt Surface.

Description of permanent witnesses established:


1. Nail in Gal Pole. N.E. 124.5
2. Near Face N.O.W. Marker Due East 71.35
3. Nail in Gal Pole. S.E. 126.95
4. Near Face N.O.W. Marker Due West 62.55

Established this 30 (day) of April (month), 19 71 by Paul Mueller Esq (name) (title)Witness: Thomas J. Peters (name) Neenah, Nebraska 68450 (address)Witness Raymond C. Norman (name) Neenah, Nebraska 68450 (address)


Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



to E

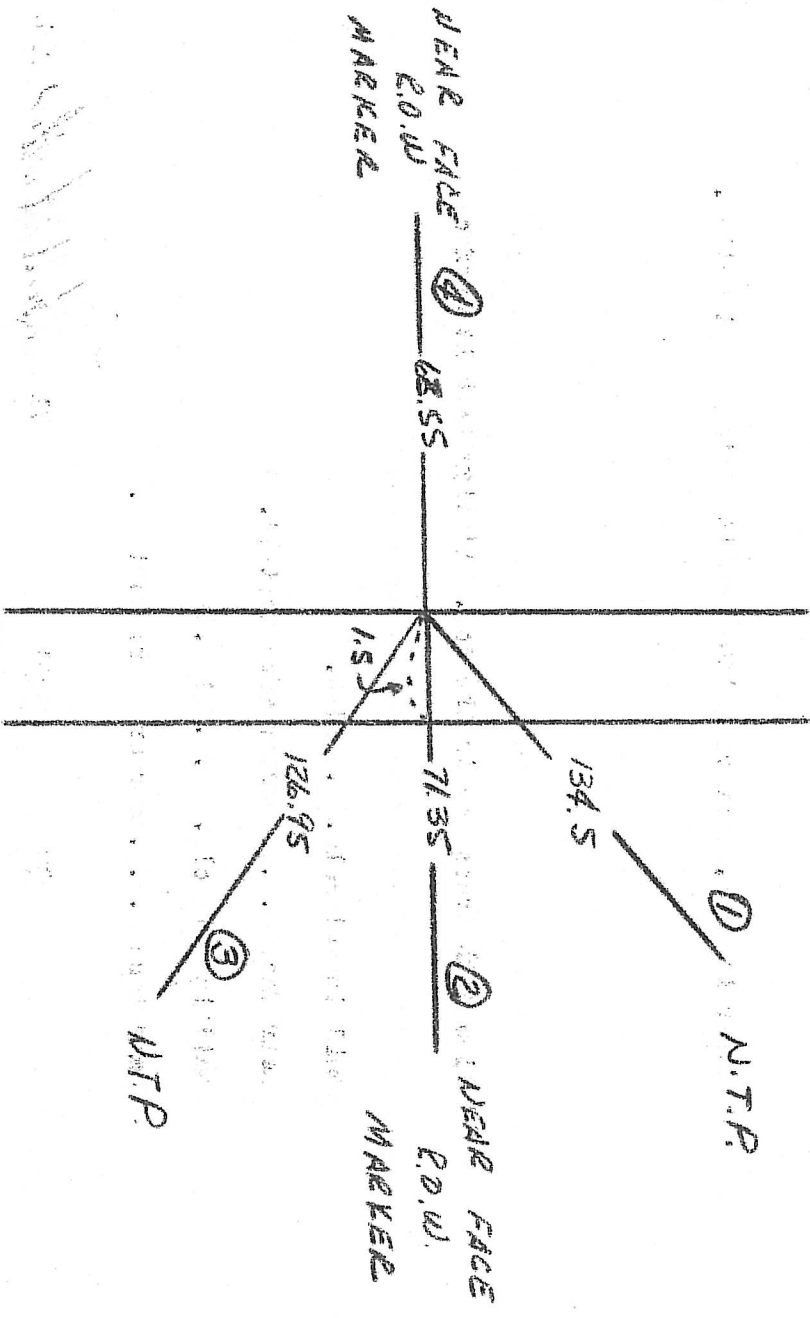

EAST 1/4 SECTION CORNER  
SEC 21-T2N-R13E  
1.54 ±  
STA - 237 + 28.3



STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: N.E. Section Cor. Section No. 21 Town 2-W Range 13-WLocation On Center Station 263473.4 Proj. No. S-49710 County RichardsonProj. No. S-497-A PlansPlace location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1" Rebar 1" Deep. Covered with asphalt during construction.

Description of corner marker established and depth below surface:

1/2" Pipe with brass cap in the top. 1" Below Asphalt Surface.

Description of permanent witnesses established:

1. S.W. Corner R.O.W. Marker. N.E. 69.4
2. Well in Well Pole S.W. 70.35
3. N.W. Corner R.O.W. Marker S.W. 112.0
4. Well in Power Pole N.W. 109.8

Established this 30 of April, 19 71 by Donald H. Miller DA 4  
(day) (month) (name) (title)Witness: Thomas J. Thomas Technician, Nebraska  
(name) (address)Witness: Raymond C. Durmon Technician, Nebraska  
(name) (address)Approved: \_\_\_\_\_  
Deputy State Surveyor Date


Copies:

- 1,2,3, Right of Way Director
- 4 Division Engineer

SEAL



E

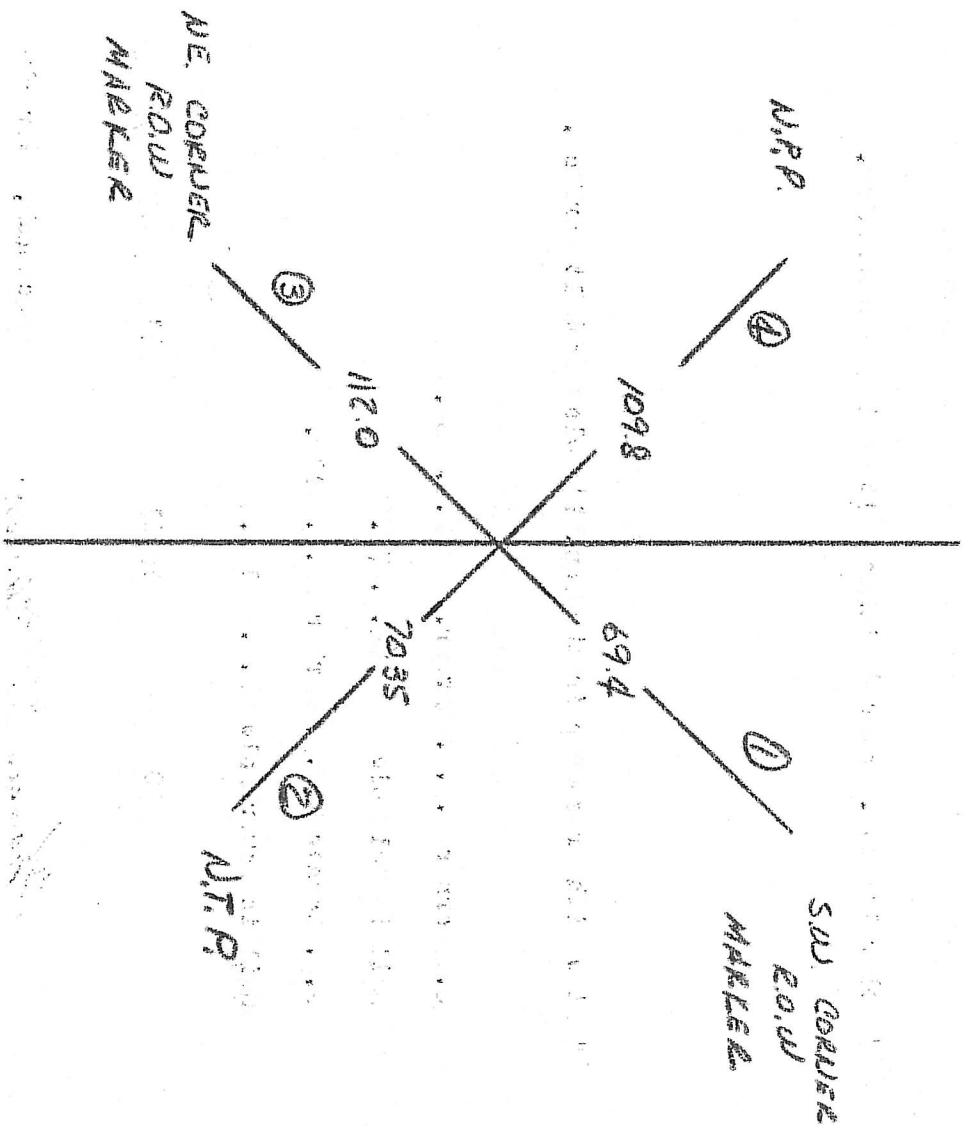

N.E. SECTION CORNER

SEC. 21-T2N-R13E

263+73.4

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner East 1/4 Corner Section No. 16 Town 2 Range 17-NLocation 17.1 N Station 290456.6 Proj. No. 54970 County RichardsonProj. No. S-497-A PlansPlace location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1" Rebar 6" Deep. Destroyed During Construction.

Description of corner marker established and depth below surface:

1 1/2" Pipe With Brass Cap in the Top. 6" Below Surface of the Shoulder.

Description of permanent witnesses established:

1. Near Road R.O.W. Marker. Due East 107.5
2. Iron Nail top Fence Post. S.E. 109.4
3. Nail in Power Pole. S.W. 53.8
4. Near Road R.O.W. Marker. Due West 47.2

Established this 20 of August, 1971 by Donald H. Williams (name) DA 3 (title)  
(day) (month) (name)Witness: Raymond C. Durman (name) Neomosh, Nebraska (address)Witness: Edward D. Morrison (name) Neomosh, Nebraska (address)Approved: \_\_\_\_\_  
Deputy State Surveyor DateCopies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



STATE OF NEBRASKA  
DEPARTMENT OF ROADS

## REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

Description of corner: East  $\frac{1}{2}$  Corner Section No. 10 Town 2-N Range 13-WLocation 1.1 Rt. Station 356+09.3 Proj. No. 6-497 0 County Richardson

Proj. No 5-497-A Plans

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

1" Rebar 1" Deep. Covered with Asphalt During Construction.

Description of corner marker established and depth below surface:

 $\frac{3}{8}$ " Pipe With Brass Cap in the Top. 1" Below Asphalt Surface.

Description of permanent witnesses established:

1. Nail in Power Pole. Due East 97.2
2. Nail in Steel Post. S.W. 98.2
3. Nail in Fence Post. Due West 90.3
4. Nail in Nail Pole. N.W. 92.1

Established this 3 of May, 1971 by Paul A. Miller (name) EA 4 (day) (month) (name) (title)Witness: Francis J. Munn (name) Neenah, Nebraska (address)Witness: Raymond C. Dittman (name) Neenah, Nebraska (address)


Approved: \_\_\_\_\_ Deputy State Surveyor \_\_\_\_\_ Date \_\_\_\_\_

Copies:  
1,2,3, Right of Way Director  
4 Division Engineer

SEAL



E S

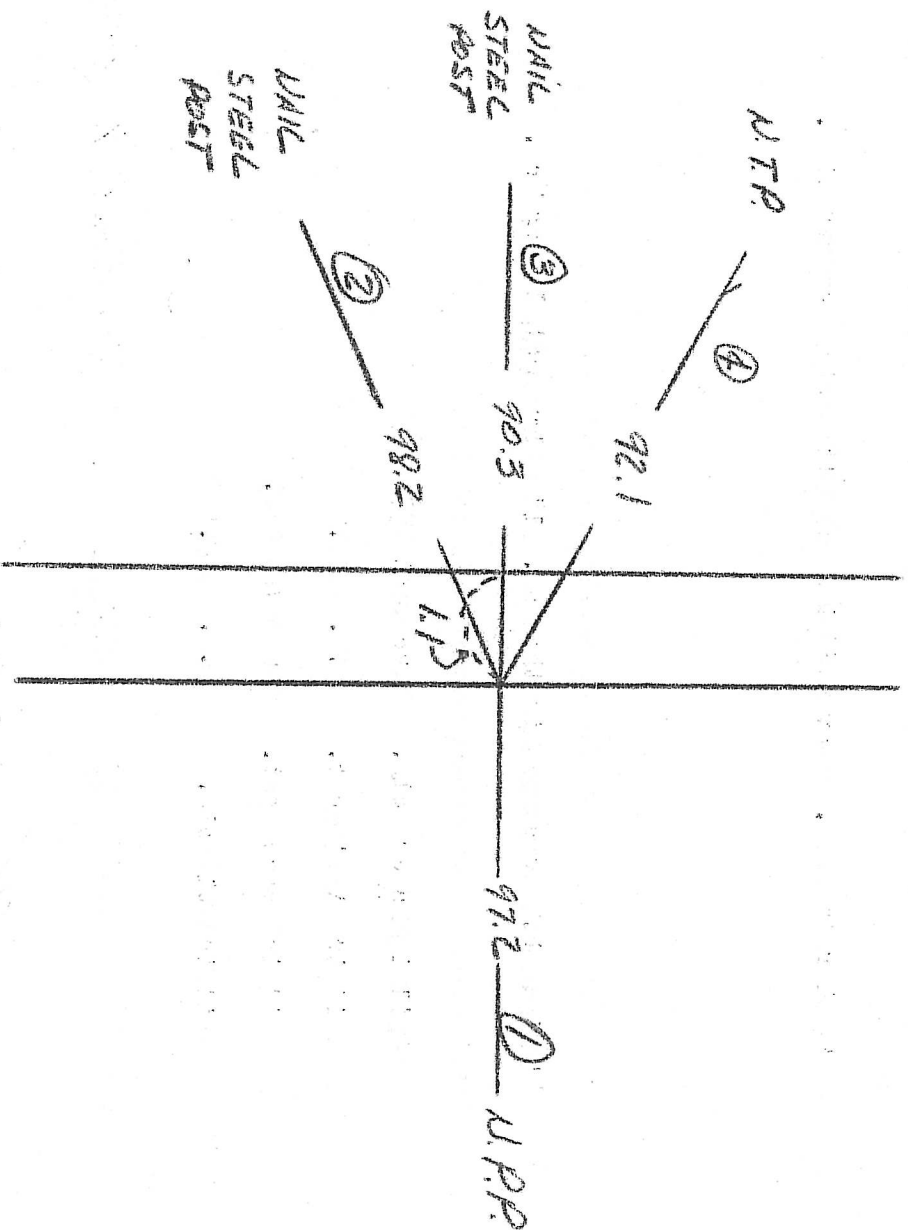

EAST 1/4 CORNER

SEC 10 - T2N - R13E

1.1 RT E

356+09.3

SX 484 R

STATE OF NEBRASKA  
DEPARTMENT OF ROADS

REPORT OF PERMANENT LAND SURVEY CORNER MARKERS AND WITNESSES ESTABLISHED

N.E. Cor.

Description of corner: N.W.  $\frac{1}{4}$  Section No. 10 Town 2N Range 13E

Location C1. Station 382#57.6 Proj. No. S-497 (A) County RICHARDSON

Place location sketch showing witness ties on reverse side of this sheet.

Description and disposition of original corner monument or established monument:

"X" In Stone Set In Concrete

Description of corner marker established and depth below surface:

Square Head Bolt In Pavement

Description of permanent witnesses established:

1. Station No. in Curb & No. in Sta 383+00 5. Top 1 back curb SW Return
2. 1" Square Top In Curb 6. Top 1 back curb NW Return
3. Top 1 back curb NE Return 4. Top 1 back curb SE Return
4. Top 1 back curb SE Return

Established this 5 of Sept. 1964 by E. B. H. H. (name) (title)

Witness: Harold Sturman (name) Sturman, Harold (address)

Witness: Gene Bauer (name) Sturman, Gene (address)

Approved:

Deputy State Surveyor


Date

Copies: 1, 2, 3 Right of Way Director  
Division Engineer

SEAL  
S. N. 4518. 242



Section line

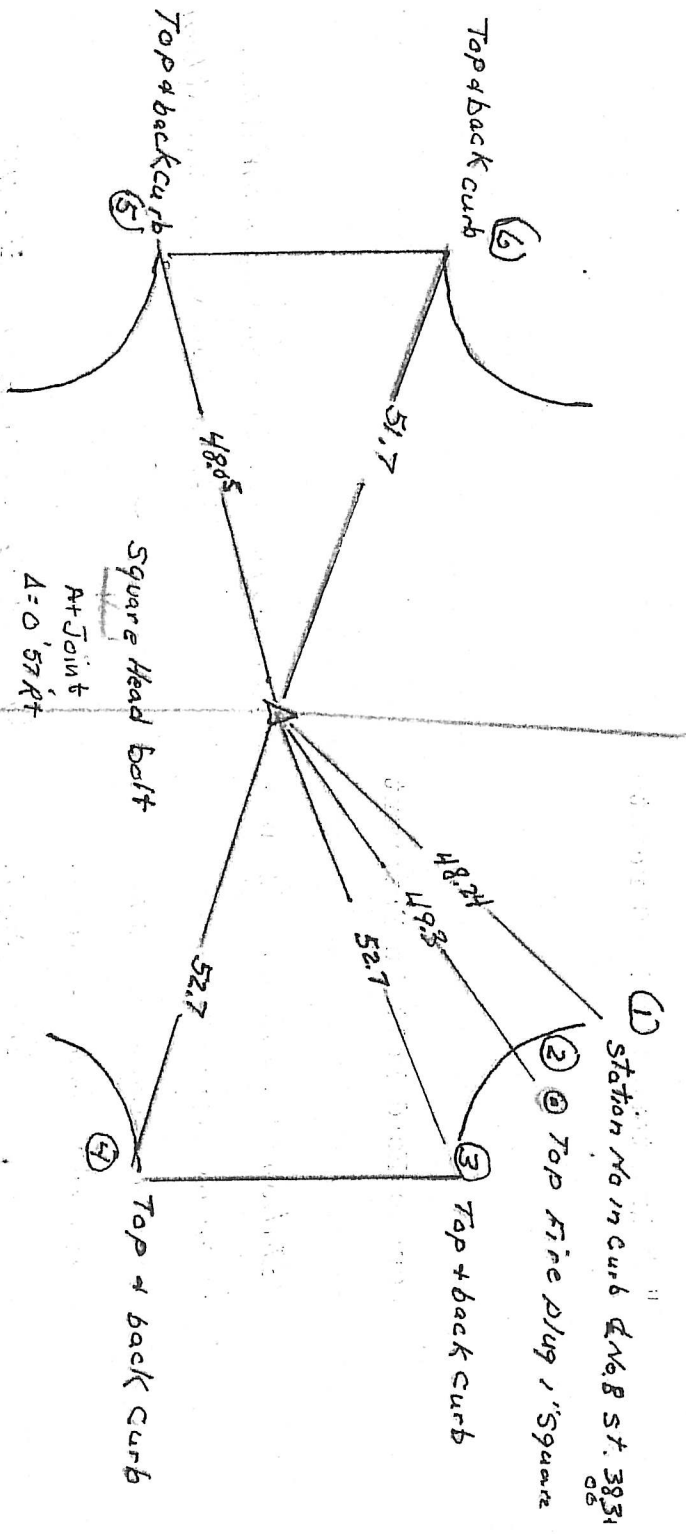

PT + 1/4 Corner  
Sta 382457.6